




316-001-01




- ◆ 用于测量狭窄凹槽的直径和键槽
- ◆ 分辨率: 0.001mm/0.00005"
- ◆ 直进式, 测头不旋转
- ◆ 按键功能: 开/关机, 初始值设置, 公/英制转换, 相对/绝对测量
- ◆ 自动关机
- ◆ 数据接口
- ◆ 棘轮测力
- ◆ 配标准杆(除0-25mm/0-1"外)

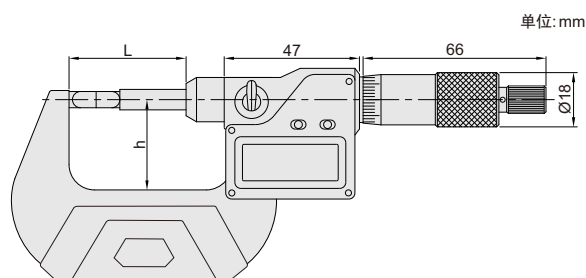

单位: mm

千分尺

标准杆(标配)



货号	量程	类型	精度	h	L	标准杆(标配)
316-001-01	0-25mm/0-1"	A	±4μm	32	57	-
316-002-01	25-50mm/1-2"	A	±4μm	44.5	82	25mm
316-003-01	50-75mm/2-3"	A	±5μm	57	107	50mm
316-004-01	75-100mm/3-4"	A	±5μm	70	133	75mm
316-005-01	100-125mm/4-5"	A	±6μm	82	158	100mm
316-006-01	125-150mm/5-6"	A	±6μm	94.5	183.4	125mm
316-007-01	150-175mm/6-7"	A	±7μm	107	208.8	150mm
316-001-02	0-25mm/0-1"	B	±4μm	32	57	-
316-002-02	25-50mm/1-2"	B	±4μm	44.5	82	25mm
316-003-02	50-75mm/2-3"	B	±5μm	57	107	50mm
316-004-02	75-100mm/3-4"	B	±5μm	70	133	75mm
316-005-02	100-125mm/4-5"	B	±6μm	82	158	100mm
316-006-02	125-150mm/5-6"	B	±6μm	94.5	183.4	125mm
316-007-02	150-175mm/6-7"	B	±7μm	107	208.8	150mm

* NEW

* NEW

* NEW

* NEW

* NEW